

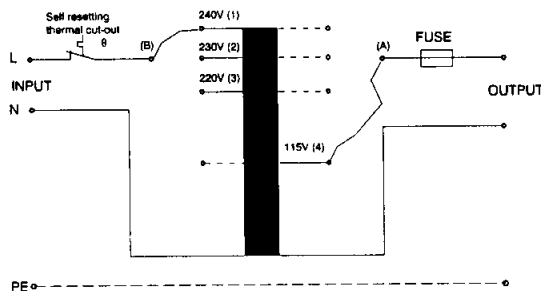
Product

Auto Transformer

Type No.

AIM 16/8

Schematic Plan




Technical Details

Safety Standards	EN 61558-1 EN 61558-2-13 ; UL 5085 CSA 22.2
Designated Voltage	Input: 115V/220V/230V/240Vac
Designated Voltage	Output: 115V/220V/230V/240Vac
Designated Current	Output: 16A (8A at U _{in} 115V)
Designated Frequency	50-60Hz.
Protection Index	IP 20
Protection Class	I
Insulation Class	B (130°C)
Ambient Temperature	Max. 40°C
Short-Circuit Protection	Short-circuit-proof
Protection Device	Fuse-Link 6,3x32mm 16AT or 8AT
Connection (Input)	Screw Terminals 4mm ²
Connection (Output)	Screw Terminals 4mm ²
Construction	Metal enclosure
Weight	approx. 16,5Kg

Description

Short-circuit-proof auto transformer in steel enclosure.
Integrated fuse and thermal protection against short
Circuit and overload.
No isolation from mains.

Marking:



www.block.eu
 IP 20


AIM 16/8


Autotransformer max. 3840VA
Spartransformator 50-60Hz



CE ta 40°C CL.B UL Class 130
Input: 115V/220V/230V/240V **Output:** 115V/220V/230V/240V
 B- (4) (3) (2) (1) A- (4) (3) (2) (1)

max. 16Aac ≡ 16AT
 (max. 8Aac ≡ 8AT at Input 115V)


 EN 61558

Transformer Only

 Type EI174/72/B



 This Transformer does not provide isolation from mains voltage
 Der Transformator besitzt keine galvanische Trennung zum Netz

Approvals (Transformer only)



Dimensions

