

Motor reactor MDB 400/16



Picture shows MDB 400/6,3

Advantages

- High damping of edge steepness
- High damping of inverter switching frequency
- Reduction of leakage current
- Long shielded cable lengths possible
- High efficiency
- Very good corrosion protection and low noise thanks to vacuum impregnation

Standards

Output reactor for frequency converter
DIN EN 61558-2-20, IEC 61558-2-20


Approvals



Motor reactor MDB 400/16

Type		MDB 400/16
Electrical data	Operating data	
	Rated voltage	3 x 400 Vac
	Voltage range	3 x 0 - 500 Vac
	Rated current	16.00 A
	for motor rated output approx.	7.50 kW
	Inductance	0.900 mH
	Rated frequency	0 - 120 Hz
	Switching frequency	2 - 6 kHz
	Environment	
	Ambient temperature max.	40 °C
Safety and protection		
Type	Open type	
Insulation class	F	
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	2500 Vac, 50 Hz	
Order numbers		
Order Number	MDB 400/16	

Type		MDB 400/16
Mechanical data	Terminal and mounting	
	Terminals phase	Screw clamp, 10 mm ²
	Terminals PE	Bolt, M4
	Fixing method	Fixing rail
	Fixing screws	M6
Measures and weights		
Weight	10.00 kg	

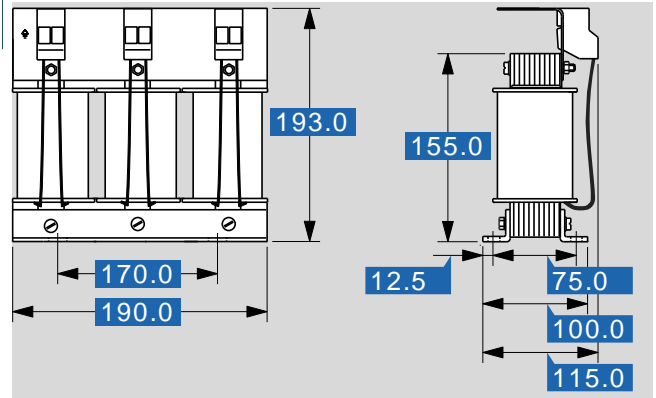

Subject to change.