

## Motor reactor MDB 400/91



Picture shows MDB 400/6,3


## Advantages

- High damping of edge steepness
- High damping of inverter switching frequency
- Reduction of leakage current
- Long shielded cable lengths possible
- High efficiency
- Very good corrosion protection and low noise thanks to vacuum impregnation

## Standards

Output reactor for frequency converter  
DIN EN 61558-2-20, IEC 61558-2-20


## Approvals



# Motor reactor MDB 400/91

Type		MDB 400/91
Electrical data	Operating data	
	Rated voltage	3 x 400 Vac
	Voltage range	3 x 0 - 500 Vac
	Rated current	91.00 A
	for motor rated output approx.	45.00 kW
	Inductance	0.050 mH
	Rated frequency	0 - 120 Hz
	Switching frequency	2 - 6 kHz
	Environment	
	Ambient temperature max.	40 °C
	Safety and protection	
	Type	Open type
	Insulation class	F
	Protection index	IP 00
Safety class (prepared)	I	
Test voltage	2500 Vac, 50 Hz	
Order numbers		
Order Number	MDB 400/91	

Type		MDB 400/91
Mechanical data	Terminal and mounting	
	Terminals phase	Flat copper
	Terminals PE	Bolt, M6
	Fixing method	Fixing rail
	Fixing screws	M6
Measures and weights		
	Weight	10.30 kg

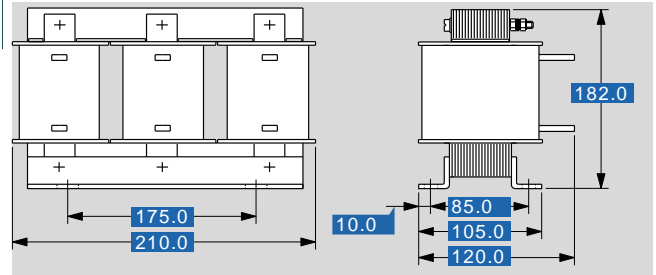

Subject to change.